



DIPLEXER UHF - GSM

D49

POLOMARCONI.IT




POLOMARCONI offers a very wide range of wireless products. Our products can be tailored according to the customer's need.

RAILWAYS AND
TRANSPORT

Electrical Specifications


Frequency range (MHz)	UHF GSM	380 ÷ 470 870 ÷ 960
Impedance (Ω)		50
VSWR		<1.6
Insertion loss (dB)		<0.7
Rejection (dB)		>38
Isolation (dB)		>38
Maximum power (W)		10

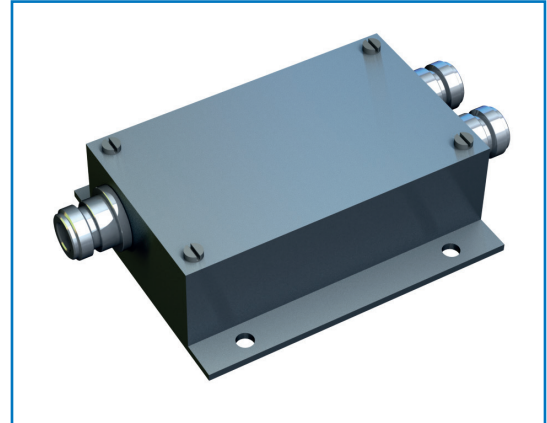

Mechanical Specifications

Connectors	Silver plated brass
Type of connection	N female
Dimensions (mm)	84x134x32
Weight (kg)	0.3
Body material	Aluminium with SURTEC 650 treatment

Mounting Flange

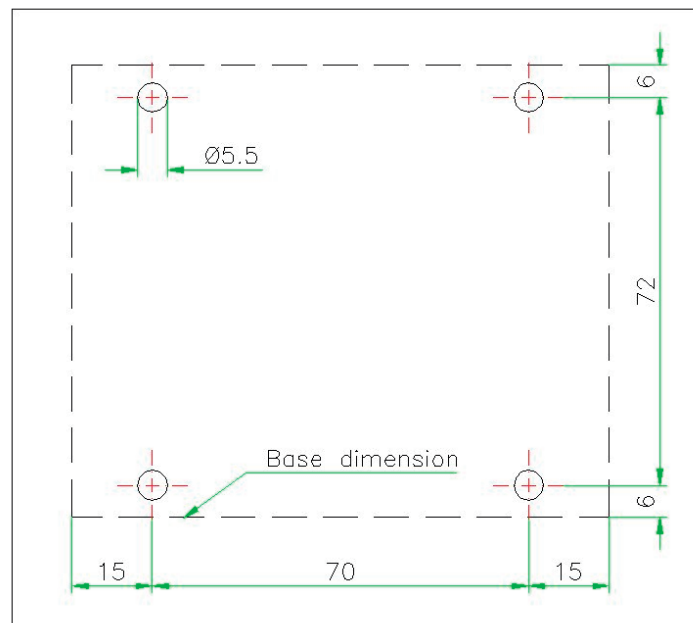

BY



Made in Italy. We reserve the right to modify these data without any notice.